


DC Brushless FAN 15x15x4mm-A Type


轴承结构：含油、液压、其他
 Bearing: sleeve、HY、other
 框外材质: 塑胶(等级:UL94V-0)
 Frame:Plastic(Flammability:UL94V-0)
 扇叶材质:塑胶:(等级:UL94V-0)
 Impeller:Plastic:(Flammability:UL94V-0)
 风扇单重:g(Weight:g)



P@Q CURVE(AT RATEDVOLTAGE)

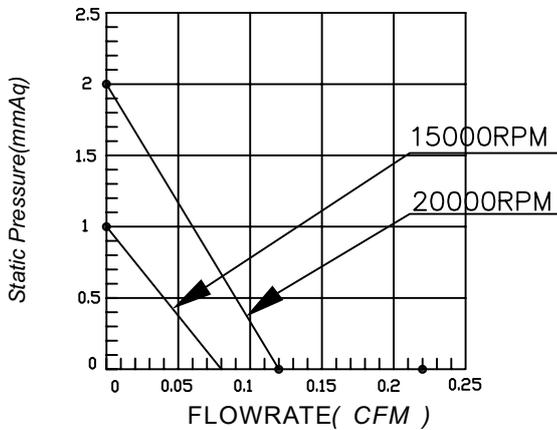

DIMENSIONS DRAWING(unit:mm)

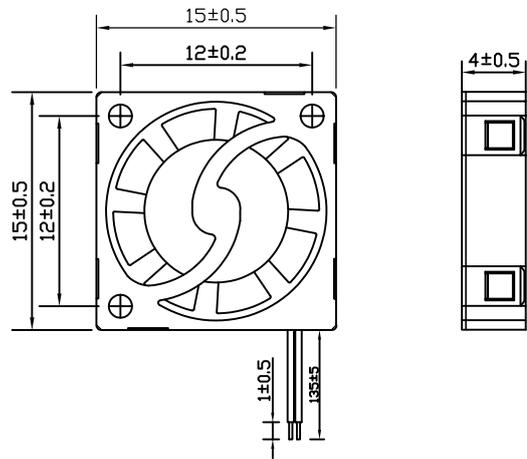

编码规则 Code Rule

例子 Example 12038H12B-1701
 12038H12X-AY

Model No. is 12038H12X; Extro P/N code is AY

X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)
 Y means special function code, it will be used for a certain parts no. or client.

产品型号 12038H12X;附加代码 AY. X是一个不确定值,它代表了不同的轴承类型, S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)
 Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

| Model | P/N Code | Rated Voltage | Operatong Voltage Range | Rated Current | Rated Input Power | Speed | Maximum Air Flow | | Maximum Air Pressure | | Noise |
|------------|----------|---------------|-------------------------|---------------|-------------------|-------|------------------|------|----------------------|-------|-------|
| 型号 | P/N 附加码 | 额定电压 | 工作电压范围 | 额定电流 | 额定输入功率 | 转速 | 最大风量 | | 最大风压 | | 噪音 |
| PART.NO. | AY | VDC | VDC | Amp | Watt | R.P.M | M³/min | CFM | mmH2O | InH2O | dBA |
| MG1504L33X | | 3.3 | 2~6 | 0.02 | 0.066 | 15000 | 0.002 | 0.08 | 1.00 | 0.04 | 24.7 |
| MG1504L05X | | 5 | 2~6 | 0.03 | 0.150 | 20000 | 0.003 | 0.12 | 2.00 | 0.08 | 32.2 |